



Sliding Mode Control for Longitudinal Control of a Platoon of Adaptive Cruise Control Vehicles

Z. ALI, S. JUMANI, T. HUSSAIN

Department of Mechanical Engineering, Mehran University of Engineering and Technology, Jamshoro, Sindh, Pakistan

Corresponding author, Z. ALI, email: engsam68@yahoo.com Ph: +92 (0) 22 277 1382
salehjumani@yahoo.com, tanweer08@hotmail.com

Received 28th March 2012 and Revised 2nd April 2012

Abstract. Automotive vehicle following systems are essential for the design of automated highway system. Vehicles equipped with adaptive cruise control system can operate on automated highway system during the vehicle following mode. This paper presents the sliding model control algorithm for the longitudinal control of a platoon of adaptive cruise control vehicles in the presence of noise signal and investigates the performance of platoon under the influence of sudden acceleration. This model has been applied on 3 vehicles moving in a platoon. The platoon has been analysed to retain the uniform velocity and safe spacing among the vehicles. Two different vehicle longitudinal models have been analysed and the simulation results obtained from them have been compared. Sliding mode control method is found suitable for the automotive vehicle following. Model simulations, in comparison with the literature, are also presented.

Keywords Terms: Adaptive Cruise Control, longitudinal dynamics, vehicle control, sliding mode control, acceleration tracking.

1 INTRODUCTION

Standard cruise control (CC) is a very familiar example of longitudinal controller that controls the vehicle's longitudinal motion i.e. its longitudinal velocity, acceleration and longitudinal distance. Standard CC system controls the throttle to keep the required speed specified by the driver. The CC system can turn into a source of annoyance for the driver if he/she has to set the speed or disengage the cruise control in a heavy traffic. The performance of cruise control can be improved by adding a distance sensor or radar sensor which measures the distance, the relative speed and the relative position of the preceding vehicle and a limited authority braking system which controls the distance and relative velocities between two vehicles. This modified cruise control system is termed as Adaptive Cruise Control (ACC) system. ACC vehicle comprises of two modes of steady state operations; speed control and vehicle following mode. This paper presents the ACC vehicle longitudinal dynamics control using the well-known sliding mode control technique.

Rajamani and Zhu (2002) have designed the longitudinal control system for an ACC vehicle which comprises of an upper level and lower level controllers as shown in (Fig. 1). The upper level controller calculates required acceleration for every vehicle. The lower level controller computes

throttle/brake commands necessary to follow the required acceleration.

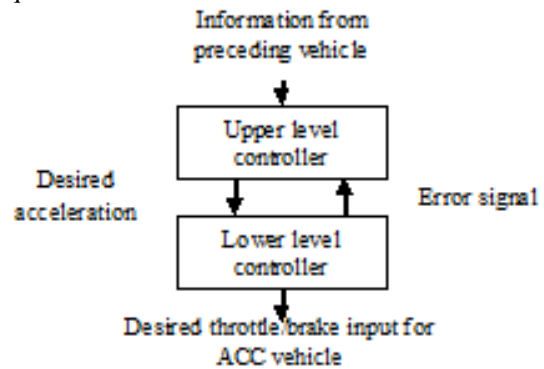


Fig. 1. ACC vehicle longitudinal control system (Rajamani 2006)

Huang and Chen (2001) introduced a control theorem for merging and splitting of the vehicle platoon with other platoon based on safe velocity profile. They have used the relative distance, relative velocity, and relative acceleration between the platoons and the same approach is used in this study for a member vehicle of the platoon. (Kato *et al.*, 2002) have proposed the model which uses the current speed of the preceding vehicle as an input for the following vehicle. They use the longitudinal velocity as the control input; tracking the maximum acceleration and deceleration coupled with road geometry and adapt the real-time data transmission

characteristics for the inter-vehicle communication control.

Z. ALI, *et al.*,

impedance control system which uses serial chain of spring-damper to generate the link between the vehicles. The information of front vehicle circulates to the subsequent vehicles via the elasticity of spring damper. The spring damper is a force control strategy to minimize the effects of forces exerted from uncertain environment. Although their model is stable in the presence of noise and parametric uncertainties but it lacks the situation when high acceleration and deceleration are applied to any one of the platoon vehicle. (Girard *et al.*, 2005) have tested an ACC and Cooperative ACC system using real-time, hybrid control software while tracking the speed profile and vehicle following applications for passenger vehicles. (Girard *et al.*, 2005) designed the controller as function of spacing error, derivative of error and/or integral of errors. Martinez and Canudas de Wit (2007) suggested a non-linear model with easy feedback loop to balance the un-modelled dynamics and exterior turbulence and uses the acceleration signal of the lead vehicle to maintain the safe distance among vehicles.

In the literature, a great deal of effort is made on developing a variety of platoon-stable control schemes using various spacing policies. Canudas de Wit and Brogliato, (1999) have discussed linear control strategies, based on inter-vehicle spacing policy, for the string stability of the platoon of vehicles. They analysed that for unidirectional operation, a platoon will be string unstable if constant spacing policy is used and designed a stable controller with speed-dependent inter-vehicle spacing which ensures the string stability of the platoon of vehicles. (Swaroop *et al.* 2001) has presented a decentralized adaptive control algorithm for a platoon of vehicles which is based on constant spacing policy. For the constant spacing policy the desired inter-vehicle distance is independent of the velocity of the controlled vehicle. Different performance criterions for a platoon of vehicle have been discussed in literature. Many researchers have designed a control law based on sliding mode technique (Swaroop *et al.* 2001; Girard *et al.* 2005; Rajamani 2006; Ferrara and Vecchio 2007).

1.1 Sliding mode control

Sliding mode is an advanced type of variable structure system. Sliding mode can be suitably employed for non-linear systems and systems with parameter uncertainties because of its discontinuous controller expression. The discontinuous control is exercised to counteract the effects of non-linearities and uncertainties (Drexel). The sliding mode control is a technique which converts a higher order to first order system. Thus,

simple control algorithm can be applied (Utkin *et al.* 1999).

246

motion, disturbance reduction and order-reduction, are the key characteristics that have motivated the study of controllers which induce sliding motions (Edwards and Spurgeon 1998). The major benefit of sliding mode is its low sensitivity to plant parameter variations which eradicates the need of precise modelling. Sliding mode allow the decoupling of entire systems activity into self-governing partial components of lower dimension and decreases the complication of feedback design (Utkin 2008).

1.2 The Sliding Surface

Variable structure control (VSC) is a system where the control law is intentionally changed during the control process according to some pre-defined rules which depends on state of the system (Edwards and Spurgeon 1998). Due to non-linearities/uncertainties in a system, the control objectives cannot be achieved with a strict pairing (gains) on one sensor/controller/valve. We need the flexibility to change the pairing automatically, as part of the control systems. The rationale of switching control rule is to steer the nonlinear state of plant curve onto a user-chosen (pre-specified) surface in state space and to retain the plant's state curve on that surface for succeeding time. This surface is known as switching surface. This surface describes the law for switching. The surface is also called a sliding surface (sliding manifold) (Edwards and Spurgeon 1998; Utkin *et al.*, 1999).

Mainly the central task is to propose a switched control which will steer plant state to switching surface and retain it on the surface once intercepted.

2

MATERIAL AND METHODS

In this study the sliding mode control approach is used for the longitudinal control of a platoon of ACC vehicles. A platoon, consisting of 3 vehicles, has been considered in this study, see Fig. 2. A simple PID feedback control algorithm has been used for the lead vehicle to achieve the desired velocity, where the only feedback signal is the actual velocity of the lead vehicle. A PID control algorithm is used for the lead vehicle to generate a reference input for the following vehicle controller. The error signal for the PID controller is the velocity error between the desired velocity for the lead vehicle to be achieved and the actual velocity of the lead vehicle.

Two different longitudinal dynamics models from (Ferrara, Vecchio 2007 and Rajamani 2006) have been adopted for the purpose of demonstration of sliding mode control approach. The control algorithm based on sliding mode method is used for both models. For both models the traction force, as

shown in (Fig. 3), is calculated using the sliding mode control method. The simulation results obtained from both models are then analysed and *Sliding Mode Control for Longitudinal Control ...*

platoon has been analysed under the influence of a noise signal in the lead vehicle.

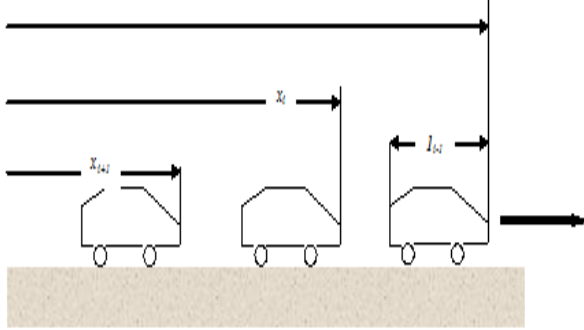


Fig. 2. A three-vehicle platoon

The block diagram for feedback control system is shown in Fig. 3.

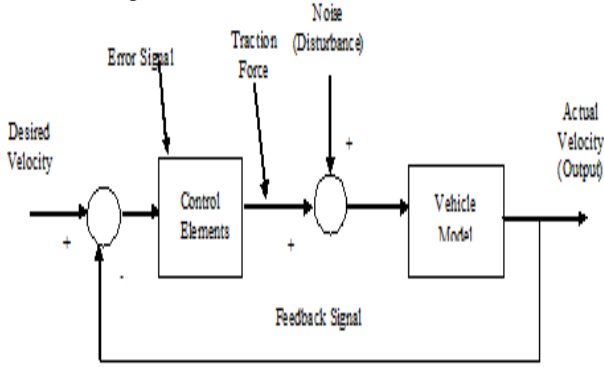


Fig. 3. Block diagram for the feedback control system.

The control signal is F_x , the traction force at the contact point between the tyre and the ground.

$$F_x = K_p(V_d - V) + K_i \int_0^t (V_d - V) d\tau + K_d \frac{d(V_d - V)}{dt} \quad (1)$$

where $V_d = 7$ m/s is the desired velocity of the lead vehicle, V is the actual velocity of the lead vehicle, $K_p = 3000$ is proportional gain, $K_i = 800$ is integral gain and $K_d = 500$ is derivative gain, mass of all vehicles is 1200 kg, aerodynamic drag coefficient is 0.3, and the coefficient of rolling resistance is 0.01.

The gains for the PID controller chosen using the hit and trail method. After many attempts these values has been found satisfactory.

3 Model for a Member-Vehicle of Platoon

A three-vehicle platoon is considered in this study. All vehicles are controlled in a way that their longitudinal positions and speed are computed by controller.

Ferrara and Vecchio (2007) longitudinal model for a member vehicle has been considered using sliding mode controller with constant headway

policy

$$Ma_i = M\ddot{x}_i = -Mfg + \dot{x}_i^2 (fK_1 - K_2) + F_x \quad (2)$$

247

a_i = longitudinal acceleration of the vehicle

x = displacement (m)

F_x = traction force (N)

V = vehicle longitudinal velocity (m/s)

f = rolling resistance coefficient

K_1 = lift parameters from aerodynamics ($N s^2/m^2$)

K_2 = drag parameters from aerodynamics ($N s^2/m^2$)

Here F_x in equation (1) is used for lead vehicle and

$d_i = x_{i-1} - x_i$ is introduced which is the relative distance between i th and $(i-1)$ th vehicle measured by i th vehicle.

The control aim is to steer the distance d_i be equal to (3)

$$L_i(\dot{x}_i) = S_{d_o} + h\dot{x}_i \quad (3)$$

Where S_{d_o} is the minimum value of the safe distance and h is the headway time. With reference to the i th vehicle, the separation error is

$$e_i = L_i(\dot{x}_i) - d_i = S_{d_o} + h\dot{x}_i - x_{i-1} + x_i \quad (4)$$

To guide this error to zero by using sliding mode method (Edwards and Spurgeon 1998; Utkin *et al.* 1999), one can select as a sliding variable

$$S_i = e_i = x_i - x_{i-1} + S_{d_o} + h\dot{x}_i \quad (5)$$

And propose a VSC law competent of disappearing the sliding variable in finite time, as a result, generating a sliding mode on the manifold $S_i = 0$ (green line in Fig. 4(c)). According to Edwards and Spurgeon (1998) and Utkin (1999), the control law has to meet the following reaching condition.

$$\dot{S}_i S_i \leq -\eta |S_i| \quad (6)$$

With η is a positive constant of sliding mode controller. Equation (6) describes that an appropriate selection of the control signal has to promise

$$\dot{S}_i = -\eta \text{sign}(S_i) \quad (7)$$

Where η is selected suitably high to satisfy equation (6), that automatically confirm that the sliding manifold $S_i = 0$ is attained in finite time (Edwards and Spurgeon 1998; Utkin *et al.* 1999). Differentiating (5), one has

$$\dot{S}_i = \dot{x}_i - \dot{x}_{i-1} + ha_i \quad (8)$$


It should be noted that the value of η used in this model is 2 which has been chosen by hit and trial method. By putting (7) in (8), it is likely to calculate the acceleration which the i th vehicle should demonstrate to satisfy Equation (6) condition,

$$a_i = \frac{1}{h}(-\eta \text{sign}(S_i) - \dot{x}_i + \dot{x}_{i-1}) \quad (9)$$


Substituting above equation in equation (2), the

t Z. ALI, et al.,


$$F_{x_i} = M \frac{1}{h}(-\eta \text{sign}(S_i) - \dot{x}_i + \dot{x}_{i-1}) + Mfg - \dot{x}_i^2(fK_1 - K_2) \quad (10)$$

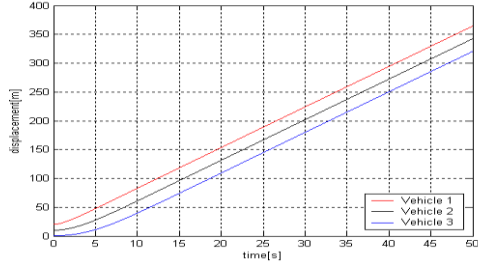

(a)

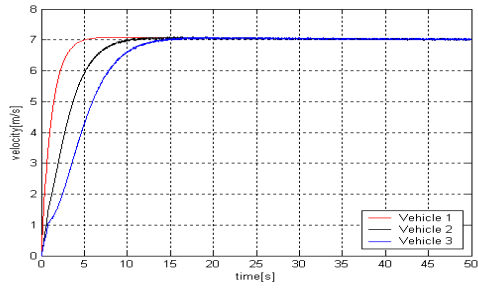

(b)

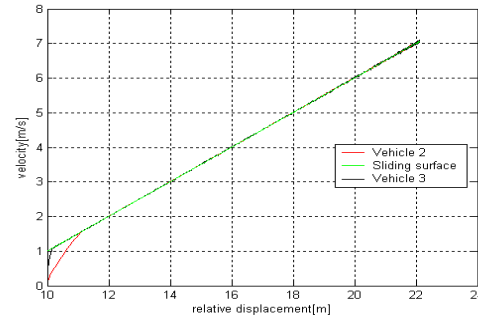

(c)

Fig. 4. (a) Displacement of the three vehicles (b) longitudinal velocities of the three vehicles (c) Phase portrait of the relative displacement of two consecutive vehicles and velocity of the i th vehicle.

In another demonstration of sliding mode control method, a longitudinal dynamics model (Rajamani 2006) has been adapted to give a sufficiently accurate representation of the longitudinal dynamics of the lead vehicle in the platoon.

$$ma_i = m\ddot{x}_i = F_x - F_{aero} - mfg - mg \sin(\theta_f) \quad (11)$$

where

m = mass of the vehicle (kg)

a_i = longitudinal acceleration of the vehicle

x = displacement (m)

F_x = traction force (N)

F_{aero} = aerodynamic force (N) = $1/2\rho A_f C_d V^2$

V = vehicle longitudinal velocity (m/s)

C_d = aerodynamic drag coefficient ($N s^2/m^2$)

f = rolling resistance coefficient

A_f = frontal area of the vehicle (m^2)

ρ = mass density of air (kg/m^3)

θ_f = slope angle (degrees)

248

For the lead vehicle F_x in equation (1) can be used and the spacing error between two consecutive vehicles, based on constant headway policy, can be defined as

$$e_i = x_{i-1} - x_i - L - h\dot{x}_i \quad (12)$$

Where L is the desired distance between the vehicles and h is the 'headway time'. The control objective is to make this error zero. The sliding mode controller (Edwards and Spurgeon 1998; Utkin *et al.* 1999) can be used to achieve this task by introducing a sliding surface S .

$$S_i = e_i = x_{i-1} - x_i - L - h\dot{x}_i \quad (13)$$

High frequency switching between the two different control structures will take place as the system trajectories repeatedly cross the sliding surface S . This high frequency motion is described as chattering (Edwards and Spurgeon 1998). One can propose a VSC able of making the sliding variable disappear in finite time, as a result, generating a sliding mode on the manifold $S_i = 0$. According to Edwards and Spurgeon (1998) and Utkin (1999), the control law has to meet the following reaching condition.

$$\dot{S}_i S_i \leq -\eta |S_i| \quad (14)$$

With η is a positive constant of sliding mode controller. Equation (14) shows that an appropriate choice of the control signal has to confirm

$$\dot{S}_i = -\eta \text{sign}(S_i) \quad (15)$$

Where η is selected suitably high to satisfy equation (14), which automatically confirms that the sliding manifold $S_i = 0$ is obtained in finite time (Edwards and Spurgeon 1998; Utkin *et al.* 1999). Differentiating (13), one has

$$\dot{S}_i = \dot{x}_i - \dot{x}_{i-1} + ha_i \quad (16)$$


It should be noted that the value of η used in this model is 2 which has been chosen by hit and trial method. By inserting (15) in (16), it is likely to compute the acceleration which the i th vehicle should show to meet condition (14),

$$a_i = \frac{1}{h}(-\eta \text{sign}(S_i) + K_1(\dot{x}_{i-1} - \dot{x}_i - L - h\dot{x}_i) + \dot{x}_{i-1} - \dot{x}_i) \quad (17)$$


Where, K_1 is the controller gain. Substituting equation (17) in equation (11), the control structures F_{x_i} for a following vehicle will be

$$F_x = m \frac{1}{h} (-\eta \text{sign}(S_i) + K_I(x_{i-1} - x_i - L - h\dot{x}_i) + \dot{x}_{i-1} - \dot{x}_i) + F_{\text{load}} + mfg$$


Sliding Mode Control for Longitudinal Control ...

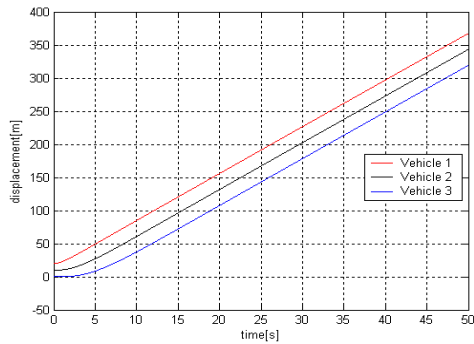

(a)

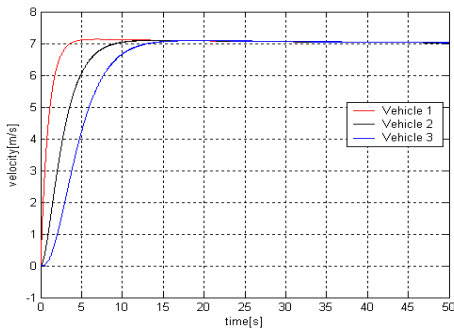

(b)

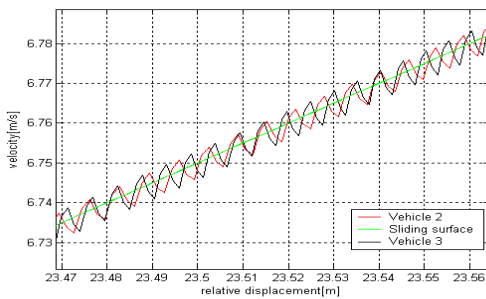


(c)

Fig. 5. (a) Displacement of the three vehicles (b) longitudinal velocities of the two vehicles (c) Phase portrait of the relative displacement of two consecutive vehicles and velocity of the i th vehicle.


4 Disturbance Effects On The Platoon Performance

This section focuses the effects of noise signals on the performance of ACC vehicle. The sources of noise considered in this study are sudden variations in acceleration and deceleration applied to the lead vehicle and the transition between steady-state to vehicle following mode. The lead vehicle decelerates at $t = 15$ s and then accelerates after $t = 20$ s and reaches the desired velocity of 10 m/s. The lead vehicle is further accelerated at $t = 30$ s and decelerated after $t = 32$ s. So the disturbance is applied at two different time durations. Fig. 6 shows that under the influence of the disturbance signals, the ACC vehicle smoothly achieves the required objectives, i.e. keeping the safe distance from the

lead vehicle, maintaining the same velocity as lead vehicle and avoiding any collision.

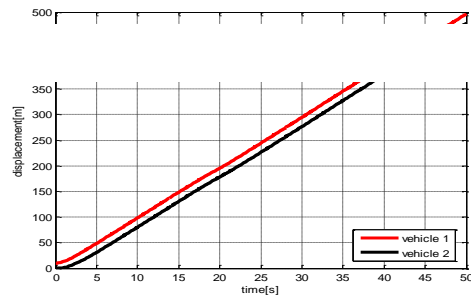

(a)

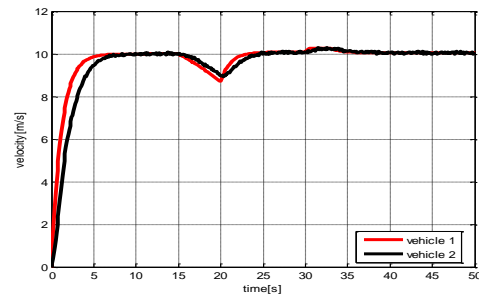

(b)

Fig. 6. (a) Displacement of two vehicles (b) velocities of the two vehicles, this simulation shows the disturbance in the lead vehicle in the form of deceleration and then acceleration

5

DISCUSSION

The sliding mode control technique has been applied to both, Ferrara and Vecchio (2007) and Rajamani (2006), models. Fig. 4 (a) and Fig. 5 (a) show the displacements of the three-vehicle platoon with the initial positions for the vehicles of platoon are, $X_1 = 20$ m, $X_2 = 10$ m, $X_3 = 0$ m. The spacing between the vehicles is likely to increase as spacing depends on the controlled vehicle velocity (not based on constant spacing as in Automated Highway System, but based on constant headway policy i.e. Adaptive Cruise Control System). Fig. 4 (b) and Fig. 5 (b) show the longitudinal velocity trajectories of the platoon. These simulation results shows very similar results when compared with the (Sun *et al.*, 2004) longitudinal dynamics model, which is also based on sliding mode control method.

The simulation results, Fig. (5), of the Rajamani (2006) longitudinal model, based on sliding mode controller, show the stability of the whole platoon and there is hardly any transient behaviour with no oscillation of the lead vehicle. The following vehicles do not overshoot and showing the similar behaviour like the lead vehicle.

The sliding mode controller can be ensured by observing Fig. 4 (c) and Fig. 5 (c) which shows the phase portrait of the relative displacement of the two consecutive vehicles and velocity of the i th vehicle. The green line shows the sliding surface (user chosen surface) and the system state trajectories (red and black lines) are designed to slide along the

high frequency switching occurs across the sliding surface defined by equations (5) and (13). These both Figs show the similar behaviour, thus, guarantying the sliding mode control approach.

Fig. 6 shows the response of the ACC vehicle under the noise signal (disturbance). This disturbance was applied to the acceleration of the lead vehicle. Initially the lead vehicle is decelerated and then it accelerates. It can be clearly observed that the sliding mode control approach perform well under the influence of this noise signal because the ACC vehicle is smoothly following the lead vehicle.

6

CONCLUSION

A platoon model consists of three vehicle has been presented in this study. The first vehicle is the lead vehicle and the two following vehicles are equipped with ACC system. Both ACC vehicles are operating under vehicle following mode. The longitudinal models of (Ferrara and Vecchio 2007) and (Rajamani 2006) have been analysed using the sliding mode control method. Simulation results show that the following ACC vehicles are smoothly following the lead vehicle during the steady-state operation and transient operation. The stability of the sliding mode method has been realised when the lead vehicle was subjected to the sudden noise signals. It has been observed that sliding mode method is suitable for the control of longitudinal dynamics of a simple vehicle model equipped with ACC system.

7

ACKNOWLEDGMENTS

The authors would like to express their sincere thanks to Mehran University of Engineering and Technology, Pakistan for giving them an opportunity to pursue this study. The research work/study was supported by Higher Education Commission, Govt. of Pakistan under Faculty Development Scheme.

REFERENCES:

Canudas de Wit, C. and B. Brogliato (1999) Stability Issues for Vehicle Platooning in Automated Highway Systems. Proceedings of the IEEE International Conference on Control Applications. Kohala Coast-Island of Hawai'i, Hawai'i, USA: 1377-1382.

Drexel, U. "Drexel Autonomous Systems Lab." from http://www.pages.drexel.edu/~vn43/tutorials/sliding_mode_control/smmsp/smmsp.html.

Edwards, C. and S. K. Spurgeon (1998) Sliding Mode Control: Theory and Applications. London, Taylor and Francis.

Ferrara, A. and C. Vecchio (2007) Collision Avoidance Strategies and Coordinated Control of Passenger Vehicles." *Nonlinear Dynamics* 49 (4): 475-492.

Girard, A. R., S. Spry and J. K. Hedrick (2005) "Intelligent Cruise-Control Applications." *IEEE Robotics and Automation Magazine* 12(1): 22-28.

Huang, A.-C. and Y. J. Chen (2001). "Safe Platoon Control of Automated Highway Systems." *Proc Instn Mech Engrs Part I* 215(5): 531-543.

Kato, S., S. Tsugawa, K. Tokuda, T. Matsui and H. Fujii (2002) "Vehicle Control Algorithms for Cooperative Driving with Automated Vehicles and Intervehicle Communications." *IEEE Transactions on Intelligent Transportation Systems* 3 (3): 155-161.

Martinez, J. J. and C. Canudas de Wit (2007) "A Safe Longitudinal Control for Adaptive Cruise Control and Stop-and-Go Scenarios." *IEEE Transactions on Control Systems Technology* 15 (2): 246-258.

Rajamani, R. (2006) *Vehicle Dynamics and Control*. New York, Springer.

Rajamani, R. and C. Zhu (2002) "Semi-Autonomous Adaptive Cruise Control Systems." *IEEE Transactions on Vehicular Technology* 51 (5): 1186-1192.

Sun, M., F. L. Lewis and S. S. Ge (2004). Platoon-Stable Adaptive Controller Design. 43rd IEEE Conference on Decision and Control. Atlantis, Paradise Island, Bahamas: 5481-5486.

Swaroop, D., J. K. Hedrick and S. B. Choi (2001). "Direct Adaptive Longitudinal Control of Vehicle Platoons." *IEEE Transactions on Vehicular Technology* 50(1): 150-161.

Utkin, V. (2008) *Sliding Mode Control: Mathematical Tools, Design and Applications*. USA, Springer Berlin/Heidelberg.

Utkin, V. J. Guldner and J. Shi (1999) *Sliding Mode Control in Electromechanical Systems*. London, Taylor and Francis.

Yi, S. Y. and K.T. Chong (2005) "Impedance Control for a Vehicle Platoon System." *Mechatronics* 15(5): 627-638.